

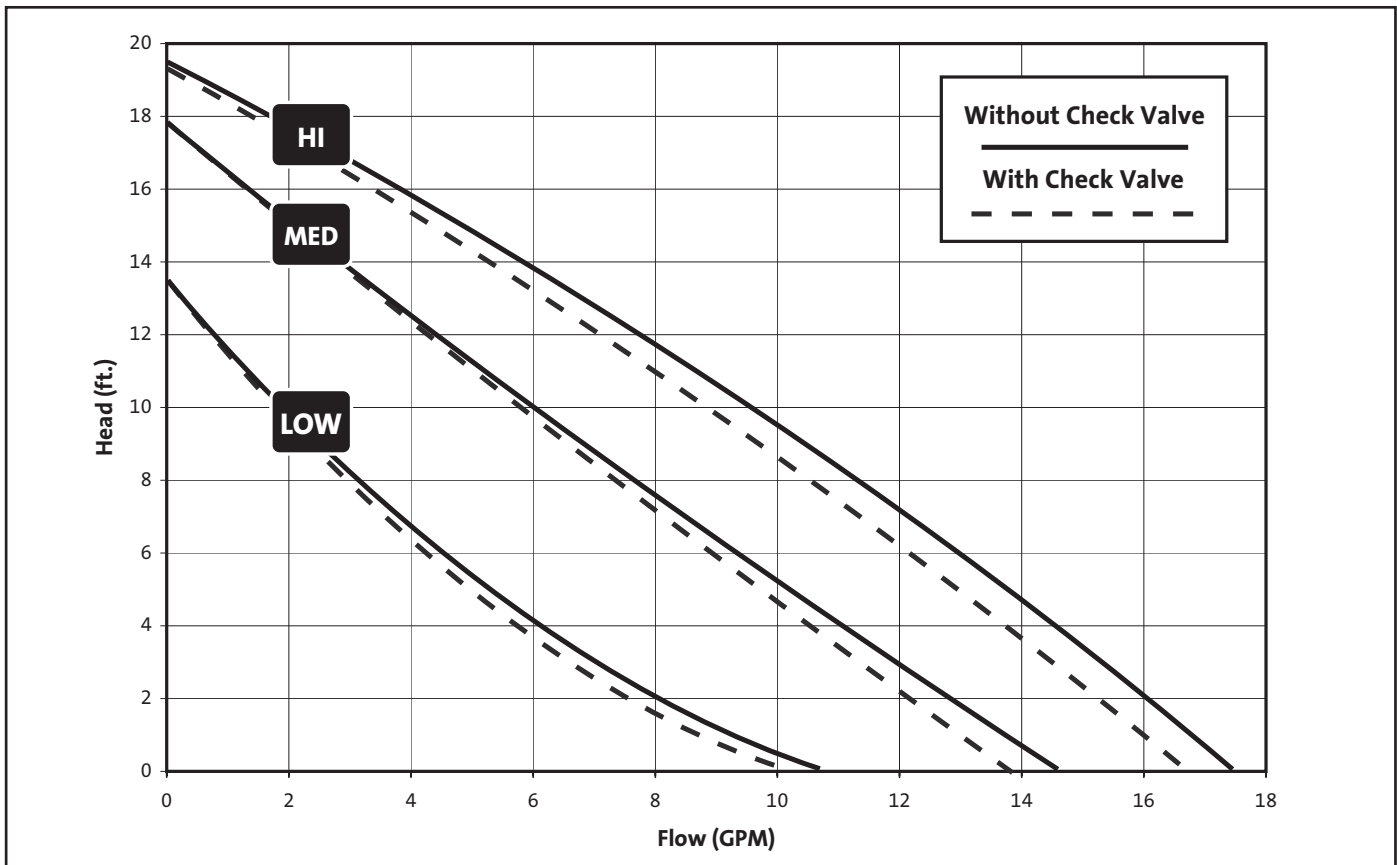


# UPS 15-58FC/FRC SUPERBRUTE



Flow range: 0 - 17.5 U.S. GPM  
 Head range: 0 - 19 FEET  
 Motors: 2 Pole, Single Phase  
 Maximum fluid temperature: 230°F (110°C)  
 Min. fluid temperature: 36°F (2°C)  
 Maximum working pressure: 145 PSI



UPS15-58FC/FRC		AMPS	WATTS	HP	CAPACITOR
115V	Spd. 3	0.75	87	1/25	10mF/180V
	Spd. 2	0.66	80	1/25	10mF/180V
	Spd. 1	0.55	60	1/25	10mF/180V

Model Type	A	B	C	D	E	F	Connection Type and Size	Shipping Wt. (Lbs.)
UPS15-58FC/FRC	6 1/2	5 1/4	4	4 3/16	3	3 5/32	GF 15/26 Flange - (2) 1/2" Dia. Bolt Holes	7 1/4